

Specification sheet / Fiche technique

SUSPENSION

MILIA - S

Structure Finish / Fini structure

- | | |
|---|---|
| ☐ SN Satin Nickel | ☐ BK Black Semi-Gloss |
| ☐ SB Satin Brass | ☐ WH White Semi-Gloss |
| ☐ CHR Chrome | |
- Other Finish Available

Suspension Option / Option de suspension

- | | |
|---|--|
| ☐ ST Stem (Same Color As Structure) | |
| 1 X Aircraft Cable + Round Electrical Wire | 3 X Aircraft Cable + Round Electrical Wire |
| ☐ CL2WH White | ☐ CL4WH White |
| ☐ CL2CLR Clear | ☐ CL4CLR Clear |
| ☐ CL2BK Black | ☐ CL4BK Black |
- Other Wire Color Available
• Sloped Ceiling Adapter Available

Shade Finish / Fini abat-jour

- | |
|---|
| ☐ MG Metallic Grey Powder Coated |
| ☐ BK Black Semi-Gloss Powder Coated |
| ☐ MBK Matte Black Powder Coated |
| ☐ WH White Semi-Gloss Powder Coated |
| ☐ MWH Matte White Powder Coated |
| ☐ SN Satin Nickel |
- Other Finish Available

Voltage / Voltage

- ☐ **120V**

Dimming Option / Option de gradation

- | |
|--|
| ☐ ELVD ELV Dimming |
| ☐ TD Triac Dimming |
| ☐ ND No Dimming |
- Other Option Available

Light Source / Source lumineuse

- ☐ **LED-8-I** Integral LED $\pm 8W$
- Other Option Available

Color Temperature - Lumens

Température de couleur - lumens


- | | |
|---|---|
| ☐ 27 2700K 670 lm | ☐ 41 4100K 694 lm |
| ☐ 30 3000K 670 lm | ☐ 41 5000K 682 lm |
| ☐ 35 3500K 670 lm | |

Project name / Nom du projet

Date

Type

Notes

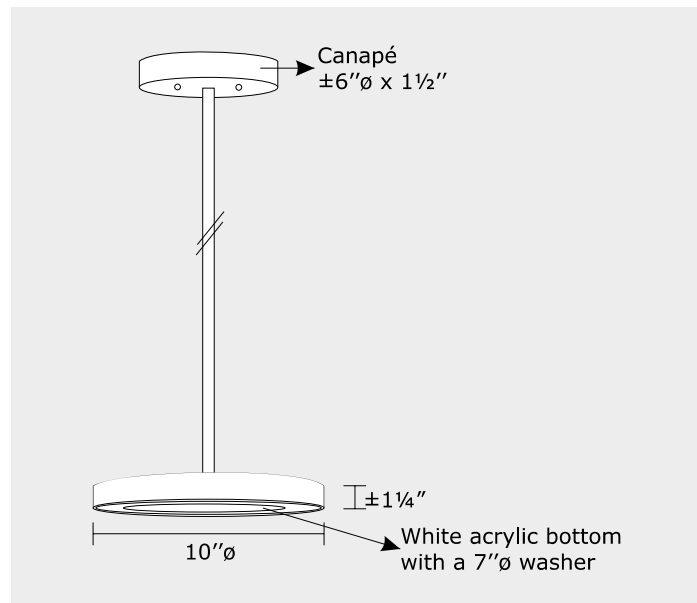

Due to continuous improvement, we reserve the right to change our products specifications.

Dans le but d'une constante amélioration, nous nous réservons le droit de changer les spécifications de nos produits.