

Specification sheet / Fiche technique
SUSPENSION

AMIRI - S

Structure Finish / Fini structure

- MG** Metallic Grey Powder Coated
- GDPC** Gold Powder Coated
- BK** Black Semi-Gloss Powder Coated
- MBK** Matte Black Powder Coated
- WH** White Semi-Gloss Powder Coated
- MWH** Matte White Powder Coated

• Other Finish Available

Suspension Option / Option de suspension

- ST** Stem (Same Color As Structure)

3 X Aircraft Cable + Round Electrical Wire

- CL4WH** White
- CL4CLR** Clear
- CL4BK** Black

• Other Wire Color Available
 • Sloped Ceiling Adapter Available

Shade Finish / Fini abat-jour

- MG** Metallic Grey Powder Coated
- GDPC** Gold Powder Coated
- BK** Black Semi-Gloss Powder Coated
- MBK** Matte Black Powder Coated
- WH** White Semi-Gloss Powder Coated
- MWH** Matte White Powder Coated

• Other Finish Available

Voltage / Voltage

- 120V**

Dimming Option / Option de gradation

- ELVD** ELV Dimming **ND** No Dimming
- TD** Triac Dimming

• Other Option Available

Light Source / Source lumineuse

- LED-15-I** Integral LED ±15W

• Other Option Available

Color Temperature - Lumens

Température de couleur - lumens


- | | | | | | |
|------------------------------------|-------|---------|------------------------------------|-------|---------|
| <input type="checkbox"/> 30 | 3000K | 1136 lm | <input type="checkbox"/> 50 | 5000K | 1325 lm |
| <input type="checkbox"/> 42 | 4200K | 1262 lm | | | |

Project name / Nom du projet

Date

Type

Notes

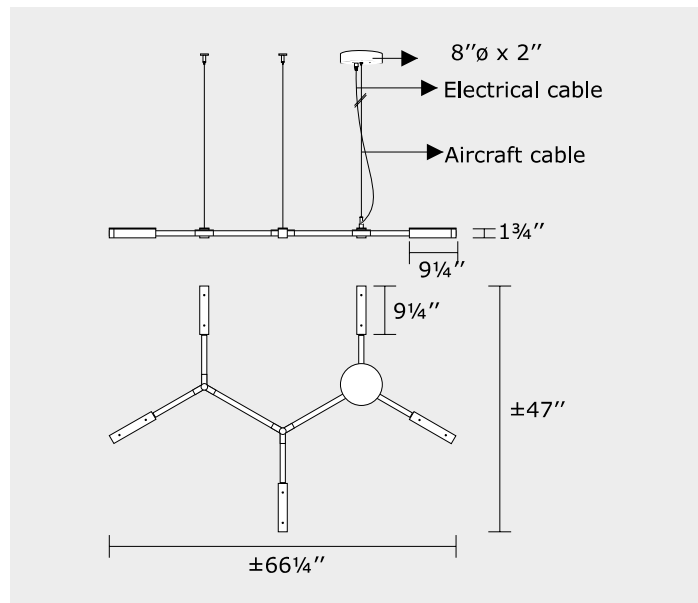

Due to continuous improvement, we reserve the right to change our products specifications.

Dans le but d'une constante amélioration, nous nous réservons le droit de changer les spécifications de nos produits.

