

Specification sheet / Fiche technique
SUSPENSION

KYAM - S

Structure Finish / Fini structure

- MG** Metallic Grey Powder Coated
- GDPC** Gold Powder Coated
- BK** Black Semi-Gloss Powder Coated
- MBK** Matte Black Powder Coated
- WH** White Semi-Gloss Powder Coated
- MWH** Matte White Powder Coated

• Other Finish Available

Suspension Option / Option de suspension

2 X Aircraft Cable + Round Electrical Wire

- CL3WH** White
- CL3BK** Black
- CL3CLR** Clear

• Other Wire Color Available

Globe Specification / Spécification du globe

Acrylic

- AWH** White
- ACLR** Clear

Globe Diameter / Diamètre du globe

- 6** 6" Ø
- 8** 8" Ø

• Other Diameter Available

Voltage / Voltage

- 120V**
- 277V**

Dimming Option / Option de gradation

- ELVD** ELV Dimming
- TD** Triac Dimming
- ND** No Dimming

• Other Option Available

Light Source / Source lumineuse

- LED-21.4-I** Integral LED ±21.4W

• Other Option Available

Color Temperature - Lumens

Température de couleur - lumens


- 30** 3000K 1500 lm
- 40** 4000K 1500 lm
- 50** 5000K 1500 lm

Project name / Nom du projet

Date

Type

Notes

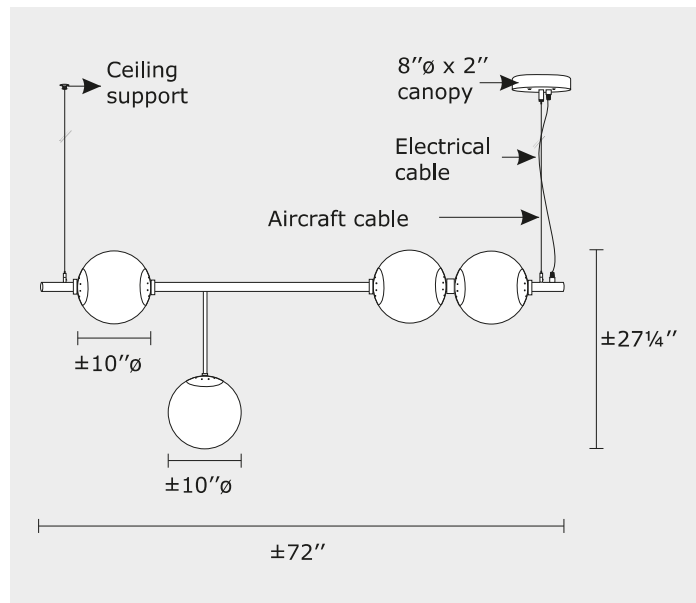

Due to continuous improvement, we reserve the right to change our products specifications.

Dans le but d'une constante amélioration, nous nous réservons le droit de changer les spécifications de nos produits.

