

Specification sheet / Fiche technique SUSPENSION

BUMBLE - S

Structure Finish / Fini structure

- | | |
|---|---|
| ☐ SN Satin Nickel | ☐ BK Black Semi-Gloss |
| ☐ SB Satin Brass | ☐ WH White Semi-Gloss |
| ☐ CHR Chrome | |

• Other Finish Available

Suspension Option / Option de suspension

- | | |
|---|--|
| ☐ ST Stem (Same Color As Structure) | |
| 1 X Aircraft Cable + Round Electrical Wire | 3 X Aircraft Cable + Round Electrical Wire |
| ☐ CL2WH White | ☐ CL4WH White |
| ☐ CL2CLR Clear | ☐ CL4CLR Clear |
| ☐ CL2BK Black | ☐ CL4BK Black |

• Other Wire Color Available • Sloped Ceiling Adapter Available

Shade Finish / Fini abat-jour

Soft Abstract Art 4 inspiration color

- ☐ Interior ☐ Exterior

- 1 _____
2 _____
3 _____
4 _____

Opposite Side

- ☐ Interior ☐ Exterior

- ☐ **BK** Black Semi-Gloss Powder Coated
☐ **WH** White Semi-Gloss Powder Coated
☐ **AA** Abstract Art

Or Other Color: _____

Graffiti Abstract Art 4 inspiration color

- ☐ Interior ☐ Exterior

- 1 _____
2 _____
3 _____
4 _____

Opposite Side

- ☐ Interior ☐ Exterior

- ☐ **BK** Black Semi-Gloss Powder Coated
☐ **WH** White Semi-Gloss Powder Coated
☐ **AA** Abstract Art

Or Other Color: _____

Voltage / Voltage

- ☐ **120V** ☐ **277V**

Dimming Option / Option de gradation

- ☐ **0-10V** 0-10V Dimming 120V-277V
☐ **ND** No Dimming

• Other Option Available

Light Source / Source lumineuse

- ☐ **MBL-A21-3** 3 X 19W A21 LED
☐ **LED-19.5-I** Integral LED ±19.5W

• Other Option Available

Color Temperature - Lumens / Température de couleur - lumens


- | | |
|--|--|
| ☐ 30 3000K 2260 lm | ☐ 40 4000K 2260 lm |
| ☐ 35 3500K 2260 lm | ☐ 50 5000K 2260 lm |

Project name / Nom du projet

Date

Type

Notes

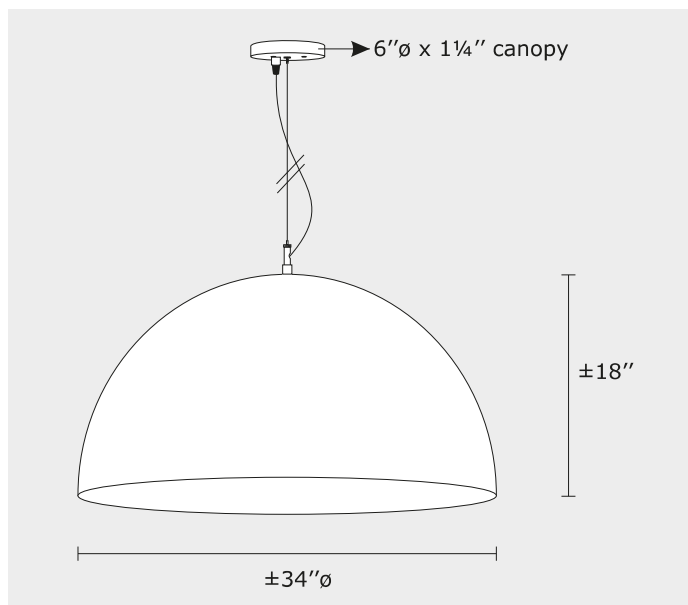

Due to continuous improvement, we reserve the right to change our products specifications.

Dans le but d'une constante amélioration, nous nous réservons le droit de changer les spécifications de nos produits.



absoluxlighting.com

