

Specification sheet / Fiche technique SUSPENSION

FLO - S

Structure Finish / Fini structure

- | | |
|---|---|
| ☐ SN Satin Nickel | ☐ BK Black Semi-Gloss |
| ☐ SB Satin Brass | ☐ WH White Semi-Gloss |
| ☐ CHR Chrome | |
- Other Finish Available

Suspension Option / Option de suspension

3 X Aircraft Cable +
5 X Round Electrical Wire

- | | |
|--|---|
| ☐ CL8WH White | ☐ CL8BK Black |
| ☐ CL8CLR Clear | |

• Other Wire Color Available
• Sloped Ceiling Adapter Available

Shade Finish / Fini abat-jour

- | |
|--|
| ☐ MG Metallic Grey Powder Coated |
| ☐ BK Black Semi-Gloss Powder Coated |
| ☐ MBK Matte Black Powder Coated |
| ☐ WH White Semi-Gloss Powder Coated |
| ☐ MWH Matte White Powder Coated |
| ☐ RMCLR Raw Metal with Clear Lacquer |

• Other Finish Available

Voltage / Voltage

- | | |
|--------------------------------------|--------------------------------------|
| ☐ 120V | ☐ 277V |
|--------------------------------------|--------------------------------------|

Dimming Option / Option de gradation

- | |
|--|
| ☐ ELVD ELV Dimming |
| ☐ TD Triac Dimming |
| ☐ ND No Dimming |

• Other Option Available

Light Source / Source lumineuse

- | | |
|---|--------------------------|
| ☐ LED-38.8-I Integral LED $\pm 38.8W$ | • Other Option Available |
|---|--------------------------|

Color Temperature - Lumens

Température de couleur - lumens


- | | |
|--|--|
| ☐ 30 3000K 3540 lm | ☐ 40 4000K 3540 lm |
| ☐ 35 3500K 3540 lm | ☐ 50 5000K 3540 lm |

Project name / Nom du projet

Date

Type

Notes

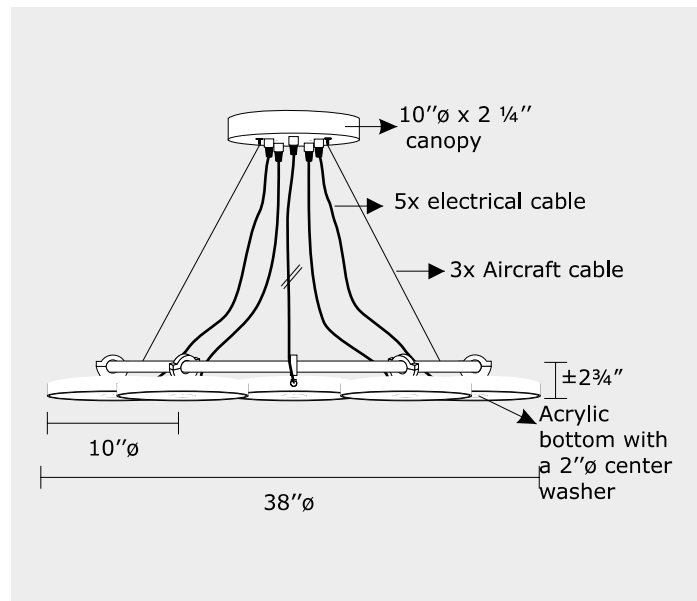

Due to continuous improvement, we reserve the right to change our products specifications.

Dans le but d'une constante amélioration, nous nous réservons le droit de changer les spécifications de nos produits.