

Specification sheet / Fiche technique

SUSPENSION

KOIO - S

Structure Finish / Fini structure

- | | |
|---|---|
| ☐ SN Satin Nickel | ☐ BK Black Semi-Gloss |
| ☐ SB Satin Brass | ☐ WH White Semi-Gloss |
| ☐ CHR Chrome | |
- Other Finish Available

Suspension Option / Option de suspension

- | | |
|---|--|
| ☐ ST Stem (Same Color As Structure) | |
| Round Electrical Wire Only | 1 X Aircraft Cable + Round Electrical Wire |
| ☐ CL1WH White | ☐ CL2WH White |
| ☐ CL1CLR Clear | ☐ CL2CLR Clear |
| ☐ CL1BK Black | ☐ CL2BK Black |
- Other Wire Color Available
• Sloped Ceiling Adapter Available

Shade Finish / Fini abat-jour

- | | |
|---|--|
| ☐ MG Metallic Grey Powder Coated | |
| ☐ GDPC Gold Powder Coated | |
| ☐ BK Black Semi-Gloss Powder Coated | |
| ☐ MBK Matte Black Powder Coated | |
| ☐ WH White Semi-Gloss Powder Coated | |
| ☐ MWH Matte White Powder Coated | |
- Other Finish Available

Voltage / Voltage

- | | |
|--------------------------------------|--------------------------------------|
| ☐ 120V | ☐ 277V |
|--------------------------------------|--------------------------------------|

Dimming Option / Option de gradation

- | | |
|---|--|
| ☐ 0-10V 0-10V Dimming 120V-277V | |
| ☐ ELVD ELV Dimming | |
| ☐ TD Triac Dimming | |
| ☐ ND No Dimming | |
- Other Option Available

Light Source / Source lumineuse

- | | |
|---|--|
| ☐ MBL-A21-1 1 X 19W A21 LED | |
| ☐ MBL-PAR20-1 1 X 11W PAR20 LED | |
| ☐ MBL-PAR30-1 1 X 18.5W PAR30 LED | |
| ☐ LED-10-I Integral LED $\pm 10W$ | |
- Other Option Available

Color Temperature - Lumens

Température de couleur - lumens


- | | |
|--|--|
| ☐ 27 2700K 1310 lm | ☐ 41 4100K 1428 lm |
| ☐ 30 3000K 1361 lm | ☐ 50 5000K 1462 lm |
| ☐ 35 3500K 1378 lm | |

Project name / Nom du projet

Date

Type

Notes

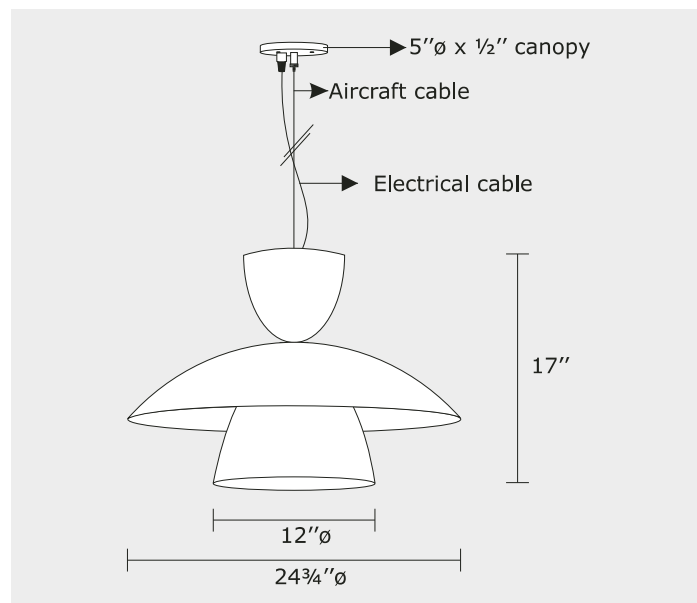

Due to continuous improvement, we reserve the right to change our products specifications.

Dans le but d'une constante amélioration, nous nous réservons le droit de changer les spécifications de nos produits.