

Specification sheet / Fiche technique SUSPENSION

FOXY - S

Structure Finish / Fini structure

- ☐ **MG** Metallic Grey Powder Coated
- ☐ **GDPC** Gold Powder Coated
- ☐ **BK** Black Semi-Gloss Powder Coated
- ☐ **MBK** Matte Black Powder Coated
- ☐ **WH** White Semi-Gloss Powder Coated
- ☐ **MWH** Matte White Powder Coated

• Other Finish Available

Suspension Option / Option de suspension

- ☐ **ST** Stem (Same Color As Structure)
- Round Electrical Wire Only 1 X Aircraft Cable + Round Electrical Wire
- ☐ **CL1WH** White ☐ **CL2WH** White
- ☐ **CL1CLR** Clear ☐ **CL2CLR** Clear
- ☐ **CL1BK** Black ☐ **CL2BK** Black

• Other Wire Color Available
• Sloped Ceiling Adapter Available

Shade Finish / Fini abat-jour

- ☐ **MG** Metallic Grey Powder Coated
- ☐ **GDPC** Gold Powder Coated
- ☐ **BK** Black Semi-Gloss Powder Coated
- ☐ **MBK** Matte Black Powder Coated
- ☐ **WH** White Semi-Gloss Powder Coated
- ☐ **MWH** Matte White Powder Coated

• Other Finish Available

Voltage / Voltage

- ☐ **120V** ☐ **277V**

Dimming Option / Option de gradation

- ☐ **ELVD** ELV Dimming
- ☐ **TD** Triac Dimming
- ☐ **ND** No Dimming

• Other Option Available

Light Source / Source lumineuse

- ☐ **LED-10-I** Integral LED $\pm 10W$ (Indirect)

• Other Option Available

Color Temperature - Lumens

Température de couleur - lumens


- | | |
|--|--|
| ☐ 35 3500K 980 lm | ☐ 40 4000K 980 lm |
| ☐ 30 3000K 980 lm | ☐ 50 5000K 980 lm |
| ☐ 27 2700K 980 lm | |

Project name / Nom du projet

Date

Type

Notes

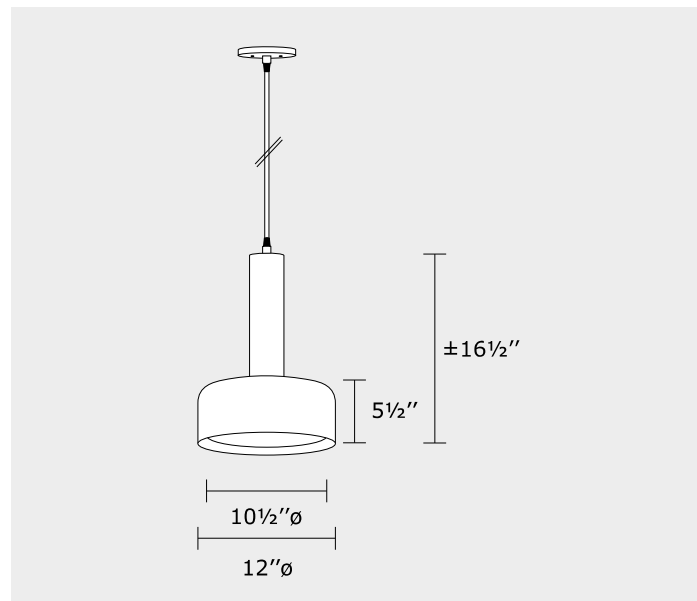

Due to continuous improvement, we reserve the right to change our products specifications.

Dans le but d'une constante amélioration, nous nous réservons le droit de changer les spécifications de nos produits.